

DALI-2 Touchpanel 8P DA2

Operating and control unit

New



Product description

- _ Capacitive DALI-2 Touchpanel with 8 freely programmable touch buttons
- _ Suitable for integration and in combination with DALI-2 compliant central control units (e.g.: Tridonic products sceneCOM evo and sceneCOM S)
- _ Multi-master compatible: Multiple control modules are possible in a DALI system
- _ Power supply via DALI line
- _ Two colour variants available: black (28004783) and white (28004782)
- _ 5 years guarantee (conditions at www.tridonic.com)

Website

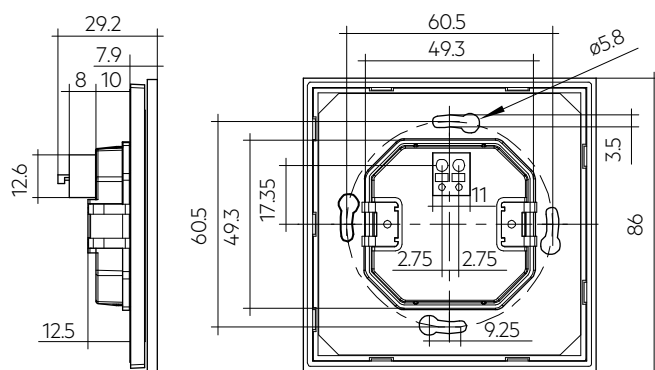
<http://www.tridonic.com/28004782>



DALI-2 Touchpanel 8P DA2

Operating and control unit

The complete data sheet for this product is available in the Downloads section.

**Ordering data**

Type	Article number	Packaging, carton	Weight per pc.
Touchpanel 8P DA2 WH	28004782	10 pc(s).	0.12 kg
Touchpanel 8P DA2 WH	28004782	10 pc(s).	0.12 kg

Technical data

Supply via	DALI cable
Supply voltage ^①	9.5 – 22.5 V
Current draw ^②	2 mA
Interface	DALI
Starting time	< 150 ms
Ambient temperature t _a	-20 ... +50 °C
Max. casing temperature t _c	75 °C
Storage temperature t _s	-20 ... +50 °C
Humidity	5 ... max. 85 % (non-condensing)
Type of protection	IP20
Housing material	PC
Housing colour	RAL 9010 (white) / RAL 9005 (black)
Mounting	Mounting box 60 x 40 mm (ø x d)
Dimensions L x W x H	86 x 86 x 29.2 mm
Guarantee	5 Year(s)

Approval marks**Standards**

EN 55015, EN 61347-1, EN 61347-2-11, EN 61547, EN 62386-101, EN 62386-103, EN 62386-301

① U_{in} acc. IEC 62386-101.

② Max. current draw is 10 mA.