


Proiettore dimmerabile Ø 14x51,8mm nero gofrato, CCT 4000K CRI≥90, lente 34°, per CORE5
Dimmerable SPOT Ø 14x51,8mm black embossed, CCT 4000K CRI≥90, lens 34°, for CORE5





24V

IP20

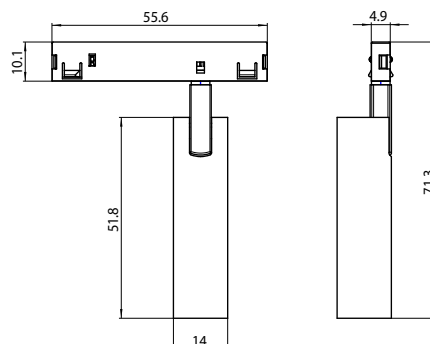

CE

Real Flux (lm):	87,7
Nominal Flux (lm):	205,0
Real Power (W):	2,0* ±10%
Efficiency (lm/W):	43,8*
LED source:	LED
Colour Temperature (K):	4000
CRI:	≥90
MacAdam:	≤3
Beam Angle:	34°
UGR:	<22
Lifetime (Khr):	>50 L80B10
Driver:	24V Dimmerabile 24V Dimmerable
V _F :	~ 24
I LED (mA):	Alimentazione a tensione costante Constant voltage power supply
L (mm):	Ø 12x51,8 mm
Materials:	Corpo in alluminio + lente 34° in PMMA Aluminium body + PMMA lens 34°
Colour:	Nero gofrato - Bianco gofrato / Black embossed - White embossed
Mounting:	Meccanico / Mechanical

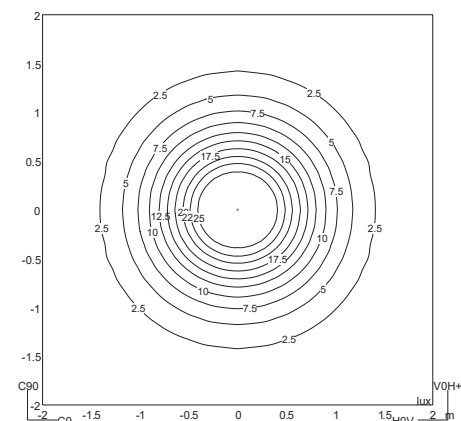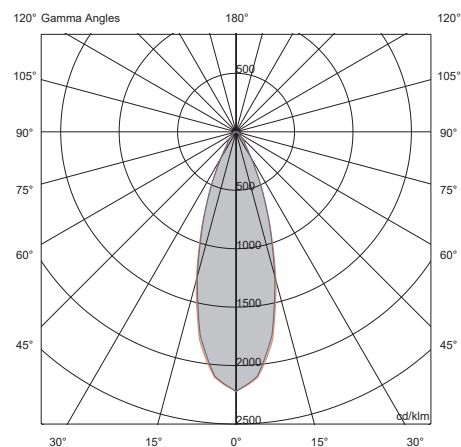

Room (m): 4x4x3h H luminaire (m): 2.5 Ref. surface: floor

Altre temperature colore e CRI disponibili su richiesta. I valori contrassegnati con l'asterisco (*) sono valori di misurazione che si riferiscono a una temperatura ambiente di 25°C salvo diversa specifica. Nel corso del tempo il flusso luminoso subisce un inevitabile calo dovuto alla tecnologia. A.A.G. Stucchi si riserva la facoltà di apportare modifiche tecniche senza preavviso.
Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice.