



ST8-E


MULTISYSTEM evo



1 - 9500-.../...ST8-E




CODE	L mm [ft]	
9500-1/...ST8(18)-E	1000 [3.28"]	
9500-2/...ST8(18)-E	2000 [3.28"]	
9500-3/...ST8(18)-E	3000 [3.28"]	





2 - USE

Recessed (ceiling)














3 - RECESSED FIXING


3a with spring:

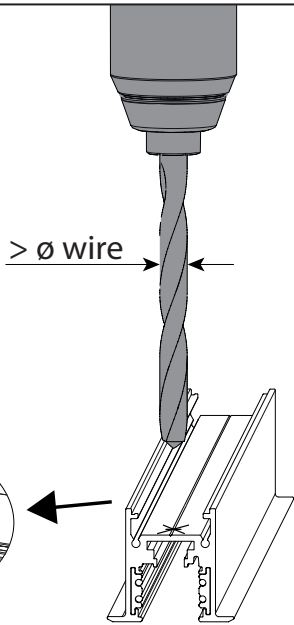



MAX LOAD					
200	600	200			
[0.66']	[1.97']	[0.66']			
25 Kg					
200	300	300	200		
[0.66']	[0.98']	[0.98']	[0.66']		
36 Kg					
150	250	200	250	150	
[0.49']	[0.82']	[0.66']	[0.82']	[0.49']	
48 Kg					
! Check drywall max load!					

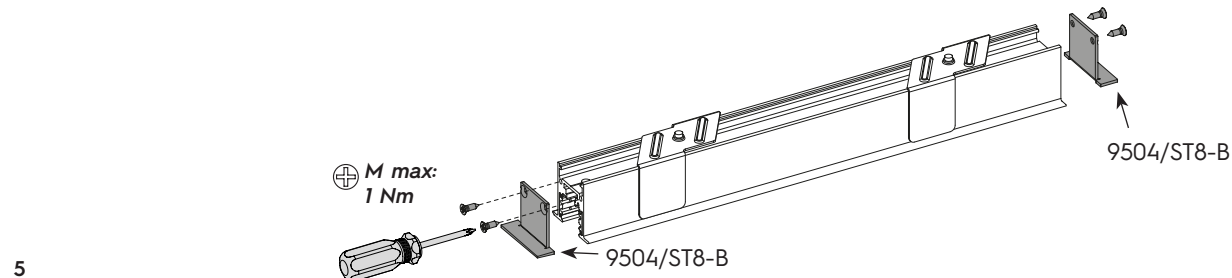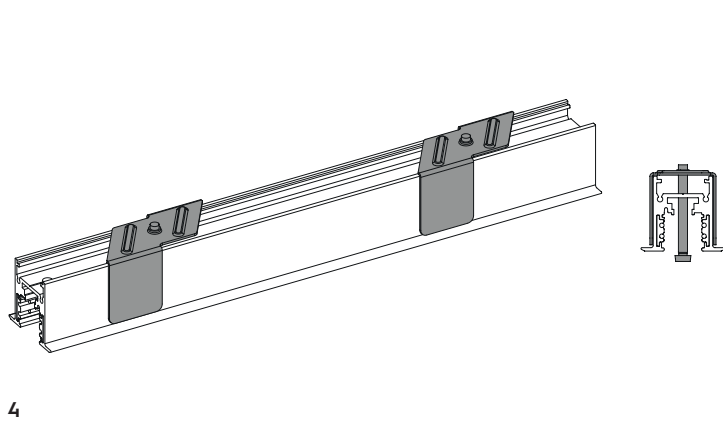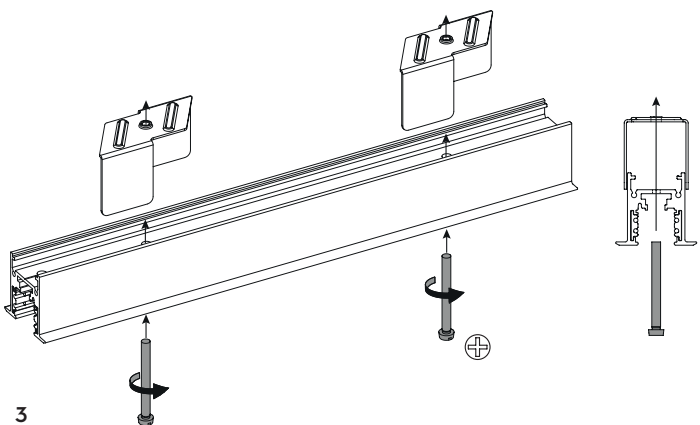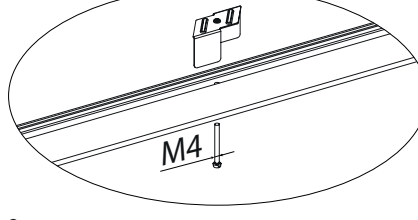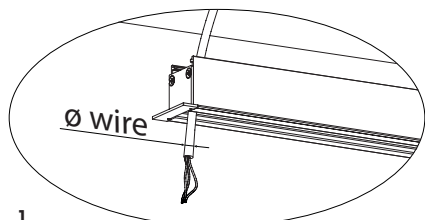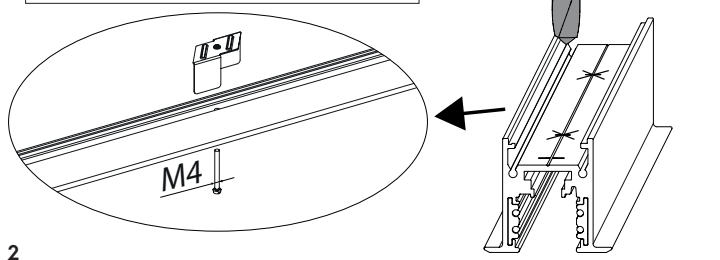

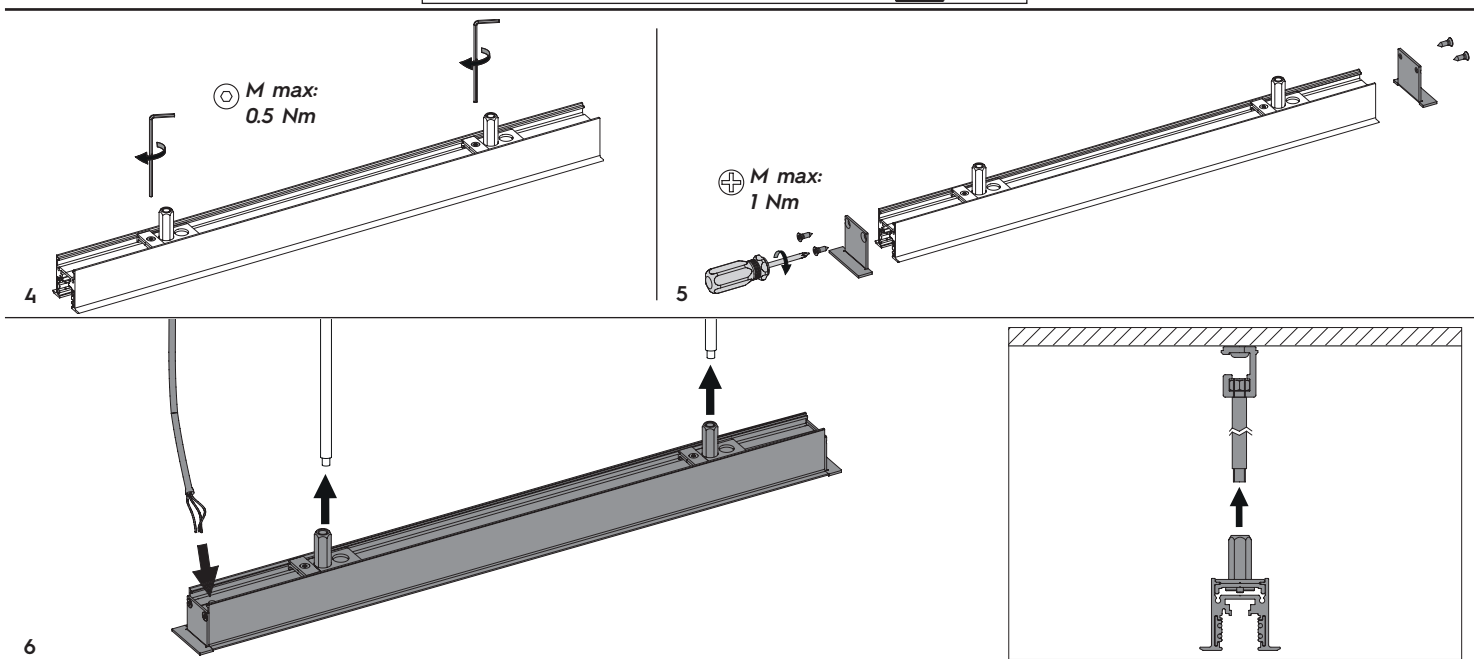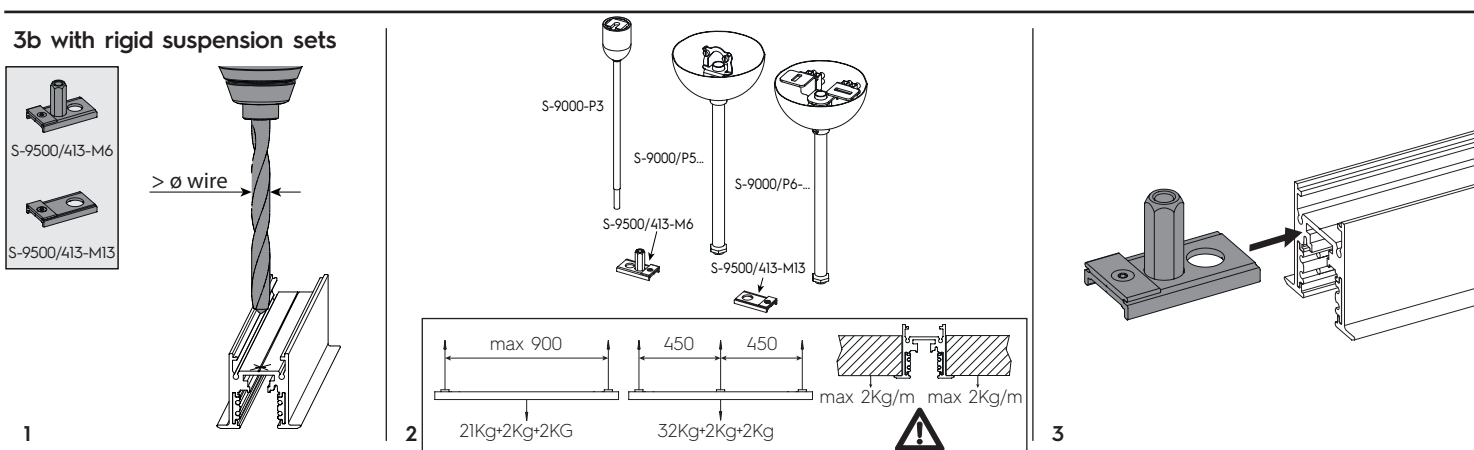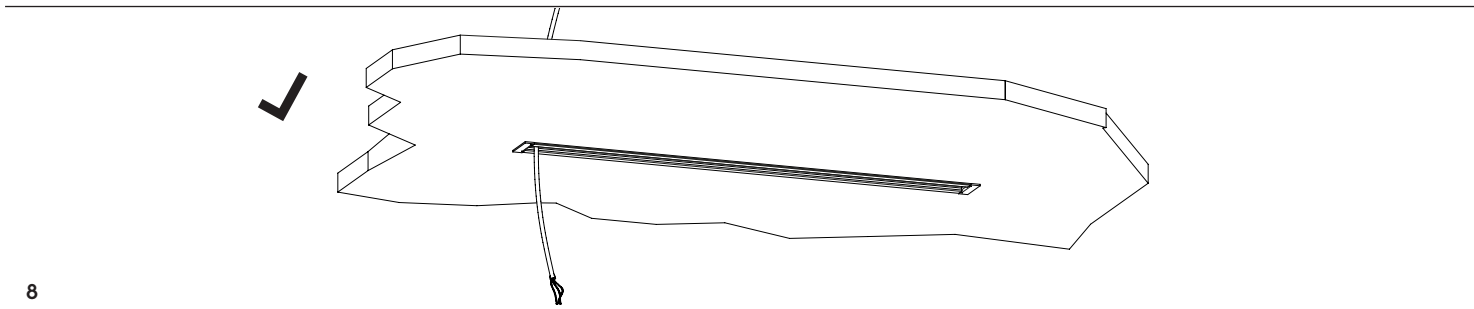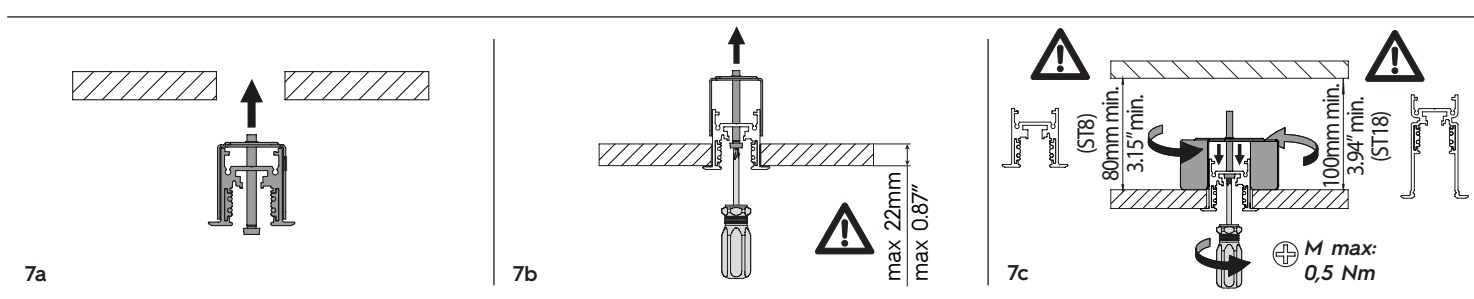
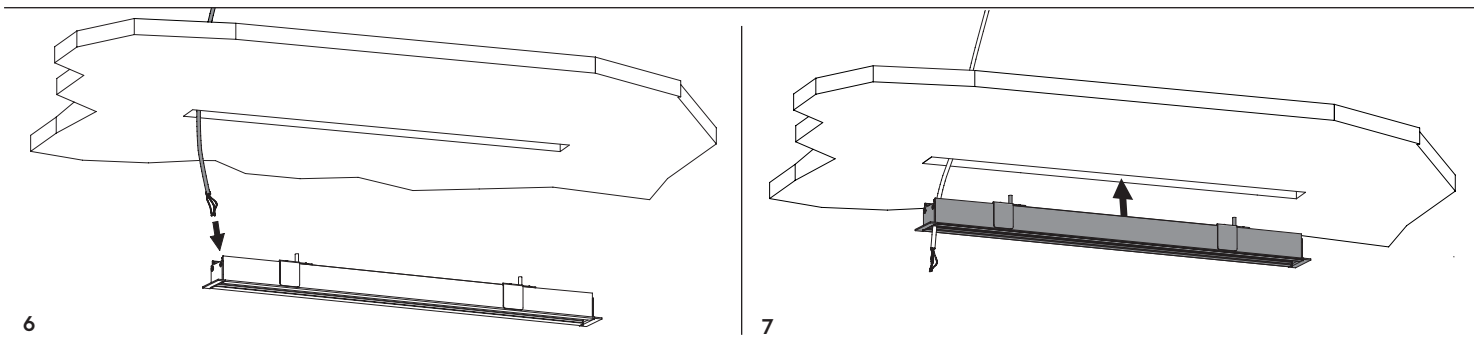


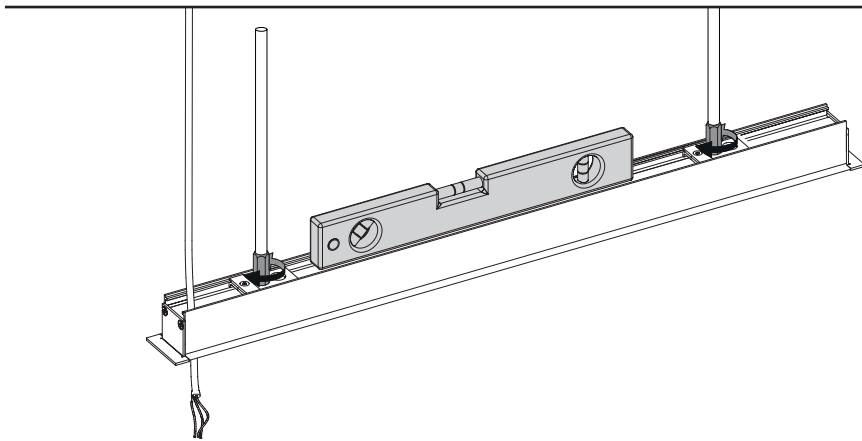



7

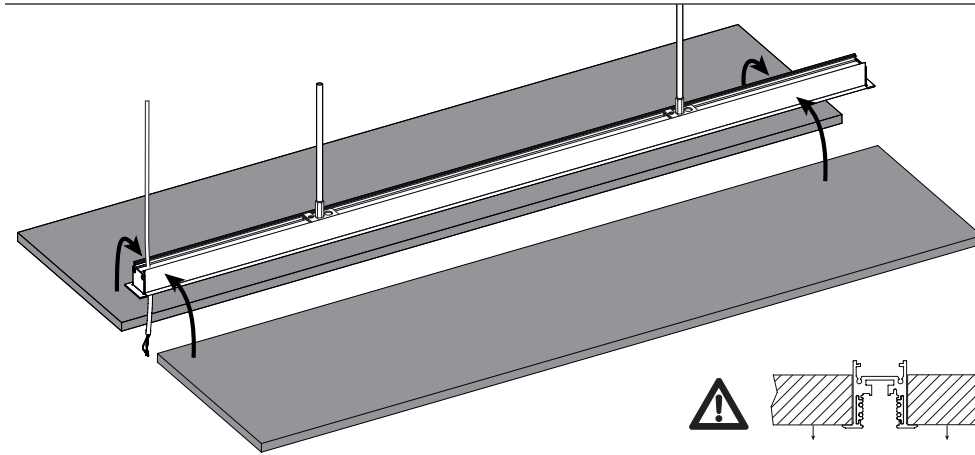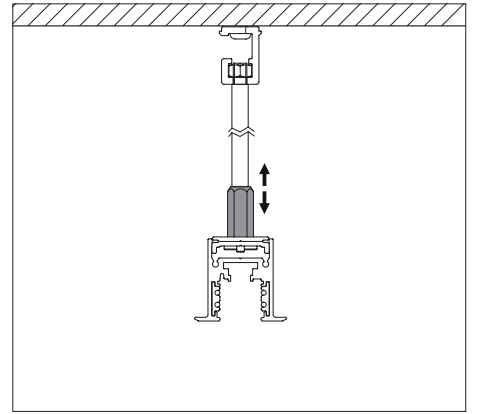


8

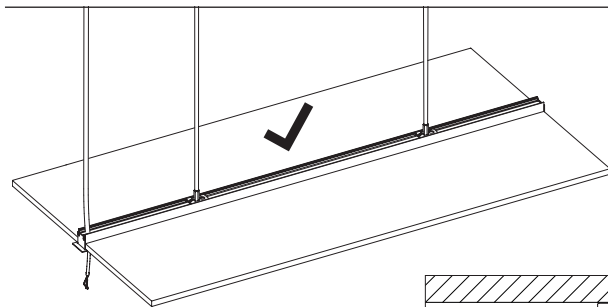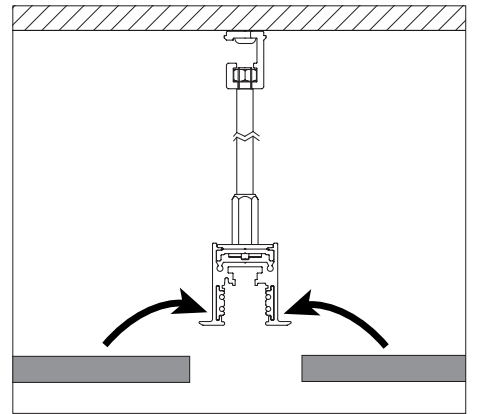


9

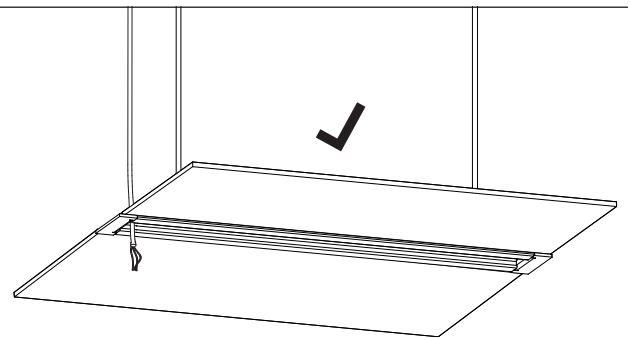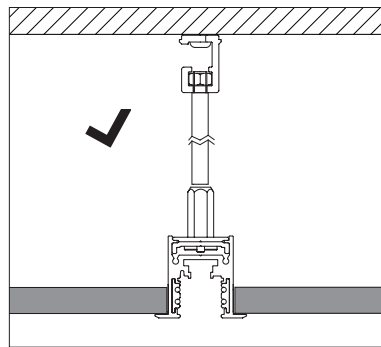


3c with brackets/clamps

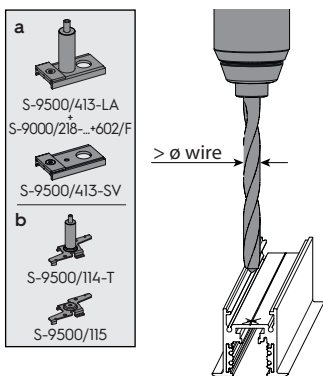


1

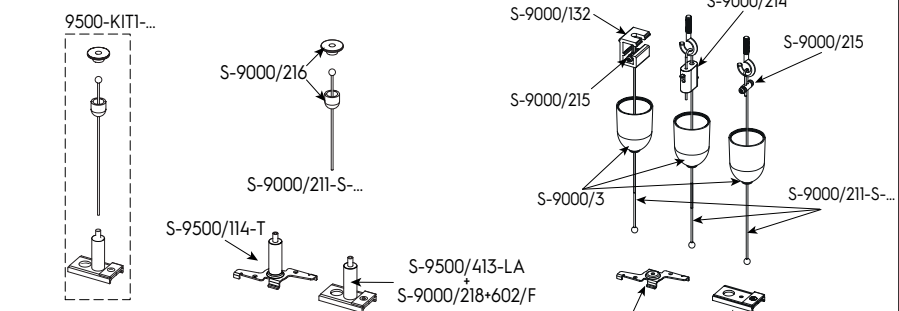


2

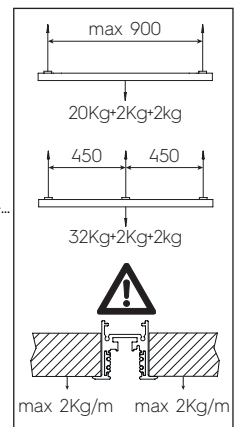


3a

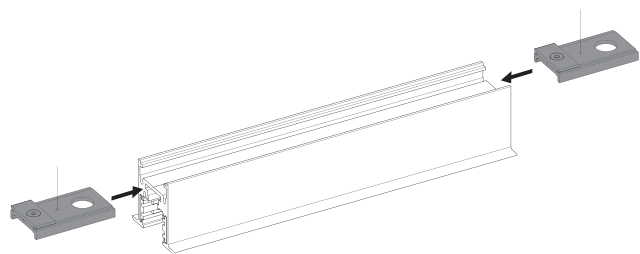


4a

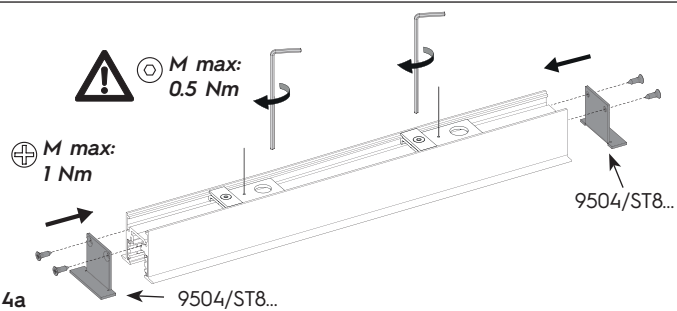



3b

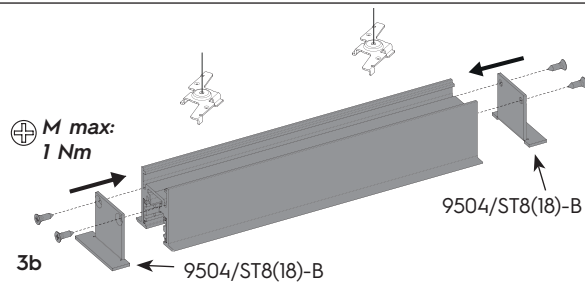



4b

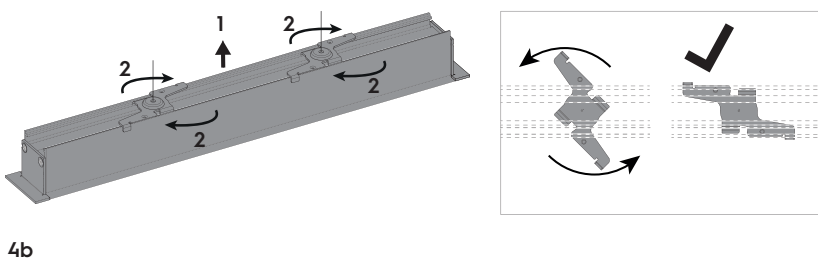






4 - IN ROW USE

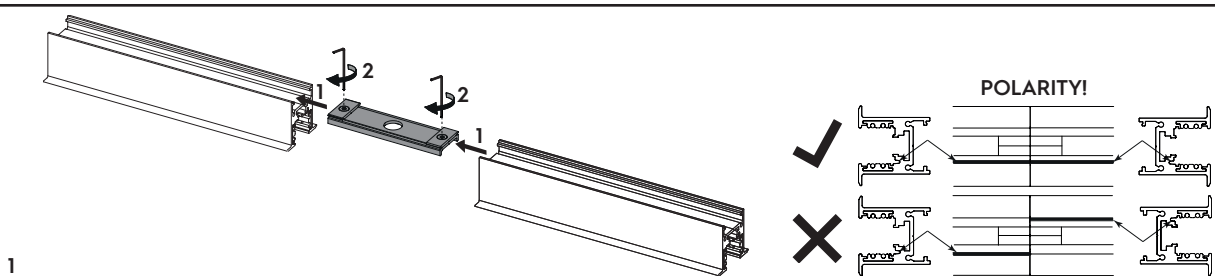



2

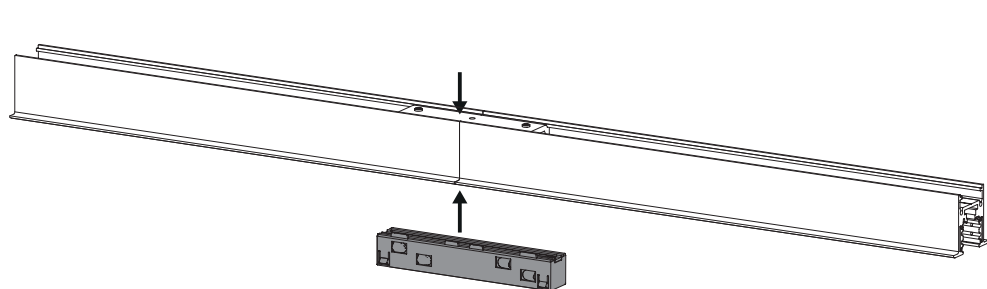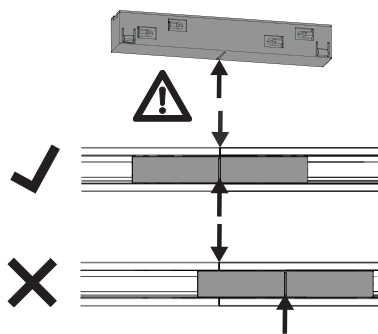


5 - S-9511/...-ST8-E

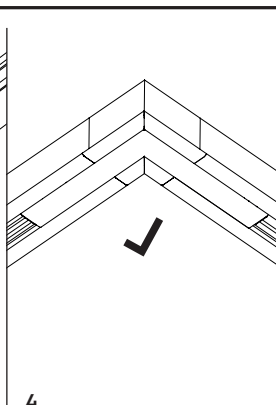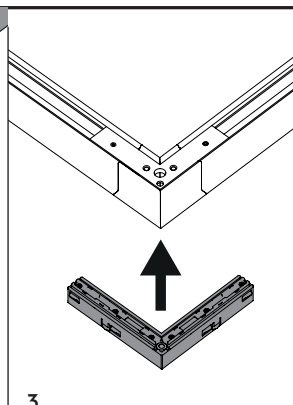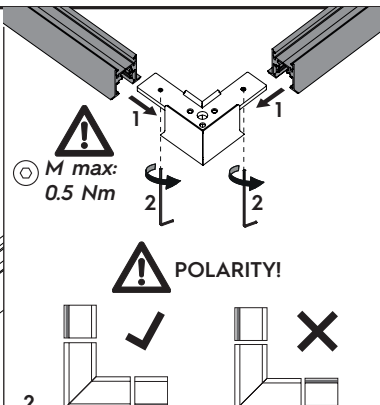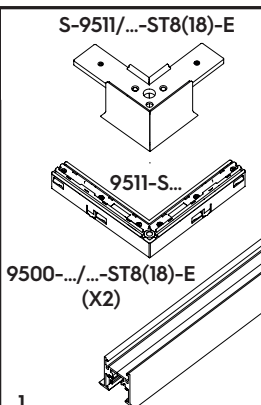

6 - CUTTING

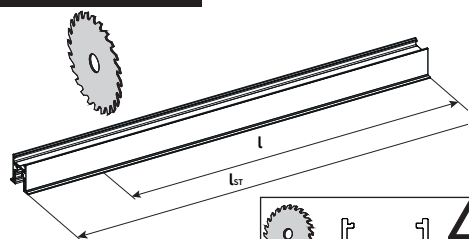


2




5mm [0.2"]




not provided

3



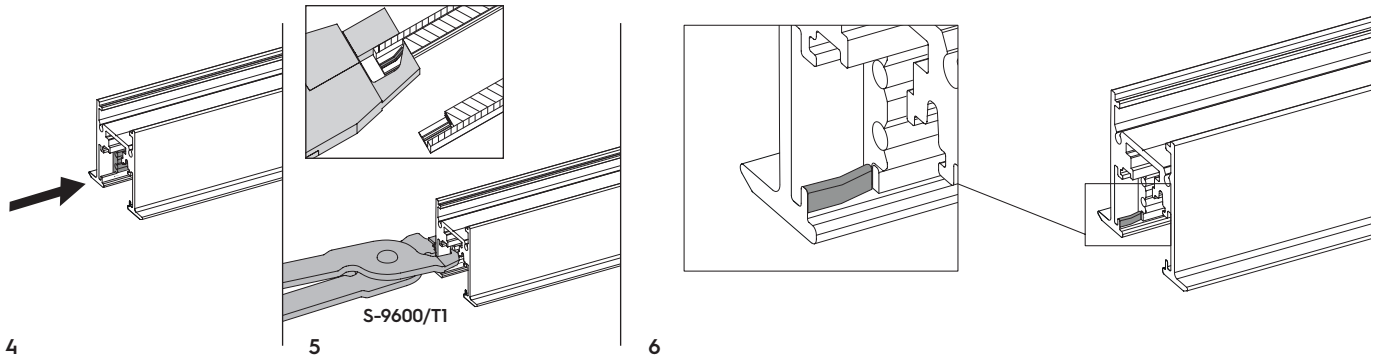

7 - 9501-S/...-E

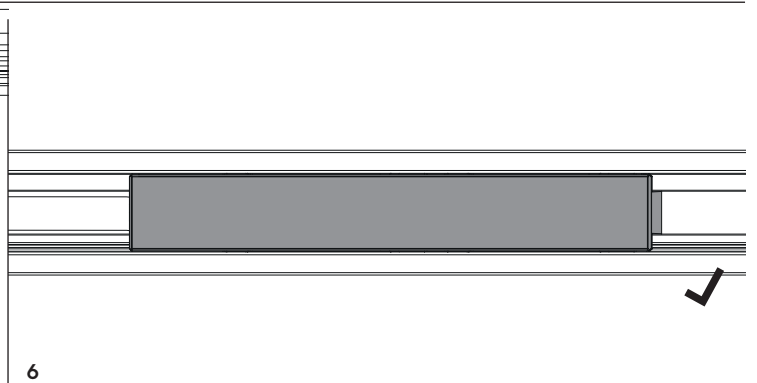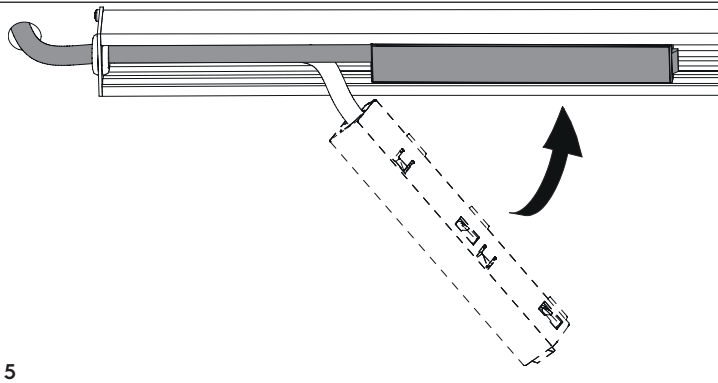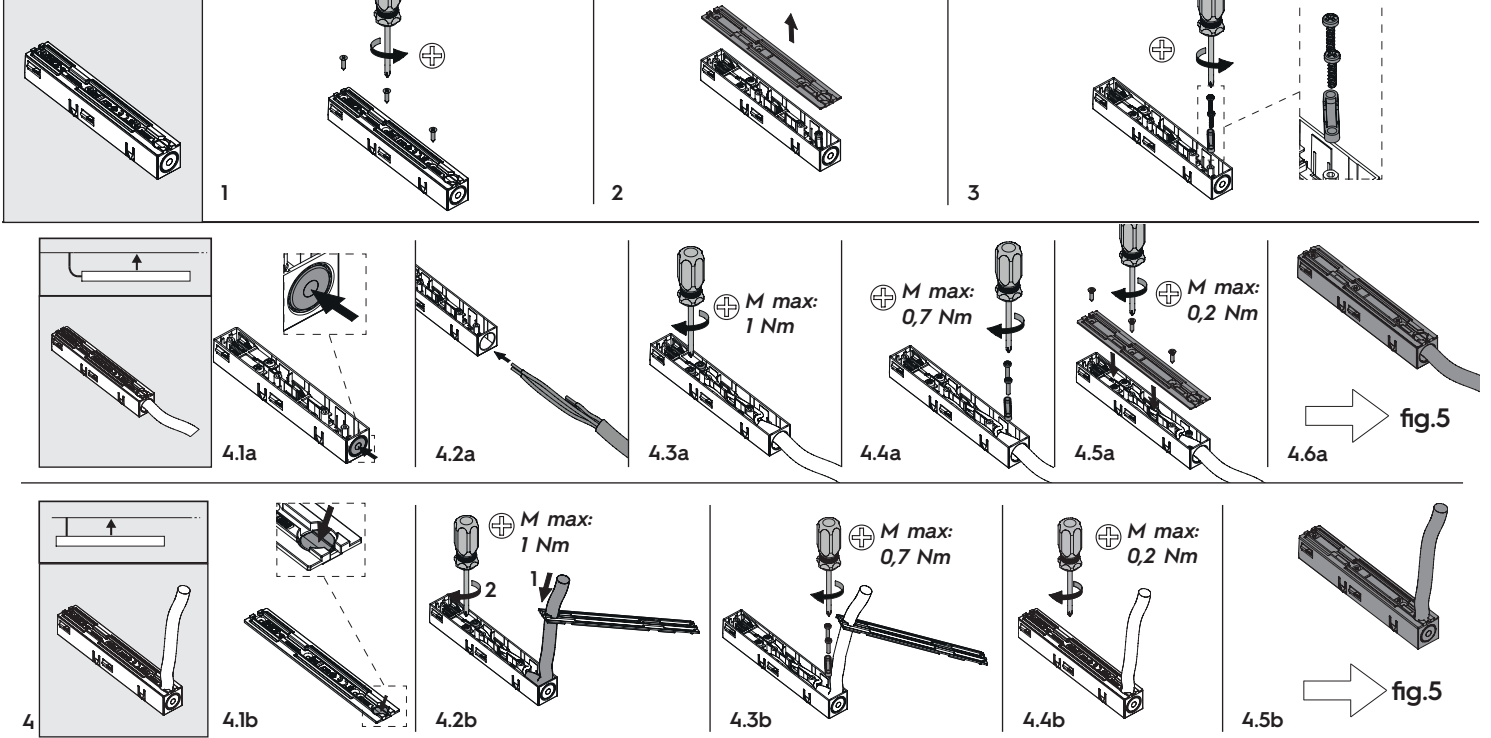

8 - 90° ANGLE

