
A.A.G. STUCCHI s.r.l. u.s
Via IV Novembre 30/32
23854 Olginate (LC)
www.aagstucchi.it
info@aagstucchi.it

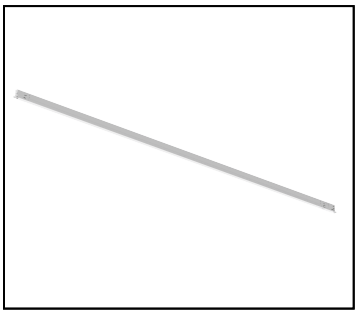

SENZAFINE HE MAIN VOLTAGE OPAL / *SENZAFINE HE MAIN VOLTAGE OPAL*


PRODUCT CODE / *CODICE PRODOTTO*

M141500/WI-O-2-MV

DESCRIPTION / *DESCRIZIONE*

230V linear light module. For 9000/9000A ONETRACK™ range tracks. Opal screen. L(mm): 1628. CRI≥80: LED.

230V linear light module. For 9000/9000A ONETRACK™ range tracks. Opal screen. L(mm): 1628. CRI≥80: LED.

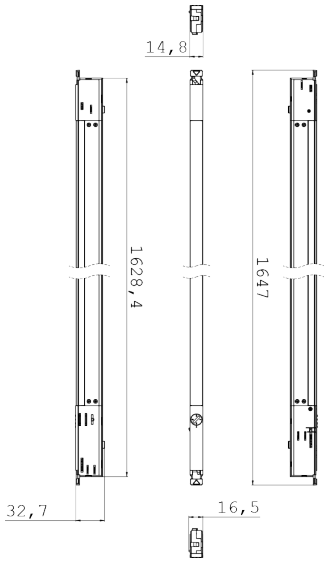

Certifications / *Certificazioni*

Technical info / *Info tecniche*


220..240Vac 50..60Hz | IP20 | RG1 unlimited


Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.
Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice. Real power: ±10% tolerance

Other colour temperatures and CRI available upon request. All values marked with an (*) are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.
Luminous flux is subject to a normal technology drop over time. A.A.G. Stucchi reserves the right to make technical changes without prior notice. Real power: ±10% tolerance

TECHNICAL DATA / *DATI TECNICI*

Application	ON TRACK
Real Flux(lm)	3336.25
Nominal Flux(lm)	4633.2
Real Power(W)	23.8
Efficiency(lm / W)	140.2
LED source	LED
Colour Temperature(K)	4000
CRI	80
MacAdam	≤ 3
Beam Angle	116,2°x110,8°
UGR	>30 — X=4H Y=8H S=0.25H; Reflection factors: 70/50/20; UGR transversal: 30.1; UGR axial: 29.9
Lifetime(Khr)	>60Khr L80B5
Driver	DALI 2
VF	~ 47
I LED(mA)	450mA
L(mm)	1628
Weight(g)	540
Materials	Aluminium body + opal PMMA screen
Colour	Bianco
Mounting	Mechanical
Packaging	Tube

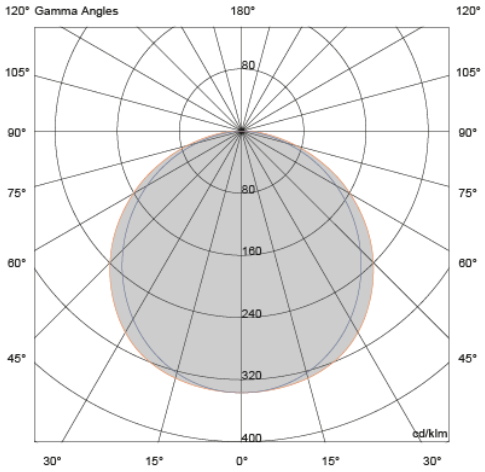

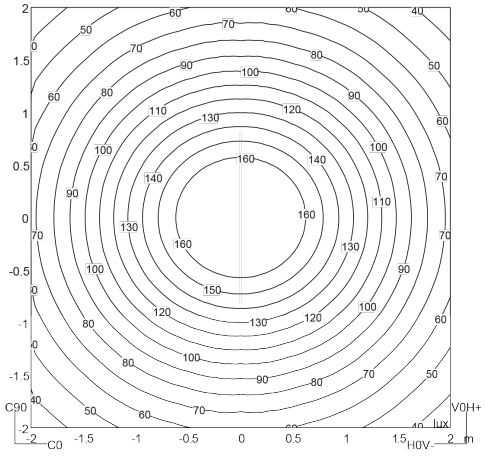

Room (m): 4x4x3h H luminaire (m): 2,5 Ref. surface: floor